


打帶包裝 Taping & Packing(Radial)



I. Taping of Radial Leads

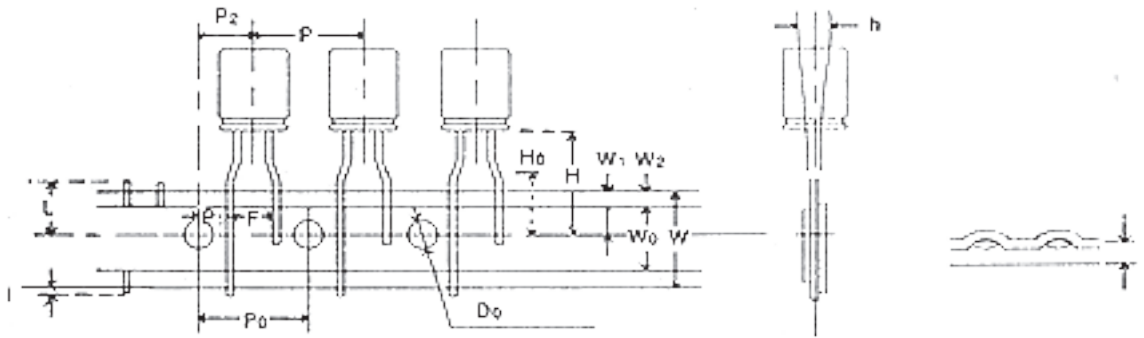


Dimensions

Pitch between components	P	12.7	±1.0
Feed hole pitch	P0	12.7	±0.2
Feed hole position gap	P1	3.85	±0.5
	P2	6.35	±1.0
Lead wire interval	F	5.0	0.8
Component alignment	Δh	0	±1.0
Carrier tape	W	18.0	±0.5
Hold-down tape width	W0	12.5	MIN.
Feed hold position gap	W1	9.0	±0.5
hold-down tape gap	W2	2.5	MAX.
Component-base height	H	18.5	±0.75
Lead wire clinch height	H0	16.0	±0.5
Feed hole diameter	D0	4.0	±0.2
Tape thickness (total depth)	T	0.7	±0.2
Lead wire protrusion	I	2.0	MAX.
Cut position of inferior components	L	11.0	MAX.

II. Packing and Q' ty

Ammo Packing 折帶

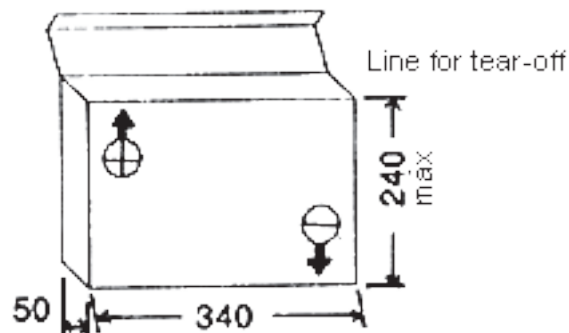

Case	Packing		Weight		Carton Dimension
	Inner Box	Carton	N.W.	G.W.	
4 \emptyset	2,500pcs	25,000pcs	10kgs	11kgs	490 x 370 x 280 mm
5 \emptyset	2,000pcs	20,000pcs	10kgs	11kgs	490 x 370 x 280 mm
6 \emptyset	1,500pcs	15,000pcs	10kgs	11kgs	490 x 370 x 280 mm
8 \emptyset	1,000pcs	10,000pcs	10kgs	11kgs	490 x 370 x 280 mm
10 \emptyset	650pcs	6,500pcs	10kgs	11kgs	490 x 370 x 280 mm